

# REPLACEMENT PARTS GUIDE

## 652M Quik-Trak™ Mower with 52 inch Side Discharge Deck

### ENGINE

#### OIL FILTER

[AM125424](#)

Change every 100 hours or Annually.

#### ENGINE OIL

[TY26669](#) (John Deere Plus-50™ 10W-30)  
(2.1 L (2.2 qt.))

Change every 100 hours or Annually.

#### AIR FILTER

[M131802](#) (PRIMARY AIR CLEANER)

Change every 300 hours.

[M131803](#) (SECONDARY AIR CLEANER)

Change every 500 hours.

#### JOHN DEERE MULTI-PURPOSE HD LITHIUM COMPLEX GREASE

[TY24416](#)

#### GREASE GUN

[TY26183](#)

Change As Required.

#### FUEL FILTER - IN - LINE

[UC21217](#)

Change every 300 hours.

#### SPARK PLUG

[M805853](#)



### FUEL & AIR

#### FILLER CAP

[TCU34085](#) (S/N: -075001)

[AUC14828](#) (S/N: 075001-)

#### MUFFLER

[TCA24531](#)

### ELECTRICAL

#### ROTARY SWITCH

[TCA22740](#) (S/N: - 060000)

[AUC18708](#) (S/N: 060001-)

#### CONTROL LEVER THROTTLE CABLE

[AUC18415](#) (S/N: - 110000)

[AUC20360](#) (S/N: 110001- )

#### REVERSE IMPLEMENT PUSH SWITCH

[AUC11785](#)

#### IGNITION KEY

[AUC12681](#)

#### BATTERY

[TY25221B](#) (12 V) (FOR USA AND CANADA)

[MCYP340PF](#) (12 V) (NOT FOR USA AND CANADA)

### TRANSMISSION/ HYDRAULIC

#### HYDRAULIC OIL FILTER

[TCA23150](#)


Change every 100 hours or Annually.


#### TRACTION DRIVE BELT

[UC18232](#) (LGTH = 1301.5 mm,  
WIDTH = 12.45 mm and TK = 8 mm)


# REPLACEMENT PARTS GUIDE

## 652M Quik-Trak™ Mower with 52 inch Side Discharge Deck


 **MOWER BLADE**  
[TCU37208](#) (CUT LENGTH = 165 mm)

 **MULCH KIT**  
[UC10725](#) (MULCH BLADE)  
[BUC10058](#) (KIT)

 **MOWER DECK LEVELLING**  
[AM130907](#)

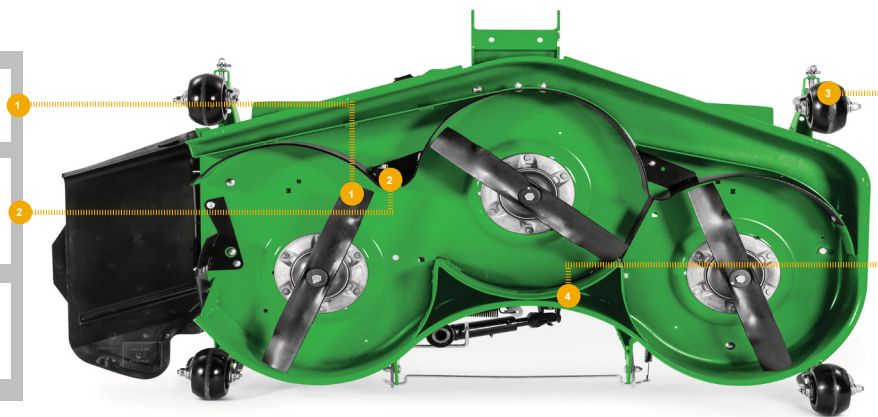

 **GAGE WHEELS**  
[UC28193](#)

 **FLAT MOWER BELT**  
[TCU37207](#) (Primary) (S/N: - 045000)  
 (LGTH = 1906.01 mm, WIDTH = 16.66 mm, TK = 10.31mm)  
[UC11305](#) (Primary) (S/N: 045001-)  
 (LGTH = 1897.2 mm, WIDTH = 16 mm)  
[TCU34215](#) (Secondary) (LGTH = 1169.41 mm, WIDTH = 16.66 mm, TK = 10.31 mm)